

CM-WT32L

Photoelectric Type Smoke Detector
with Duo-LEDs

ISO9001

Approvals: CE




■ ADVANTAGES

- * With the principle, this detector will be activated more quickly, accurately, and reliably. And no false alarm from chemicals, exhaust gas, wind and exterior light.
- * Detector has passed EMC test, which greatly eliminates false alarms caused by interference from nearby sources.
- * Duo-LEDs display separately. Green : Stand-by status;
Red : Alarm status.

■ DIMENSIONS

Unit: mm

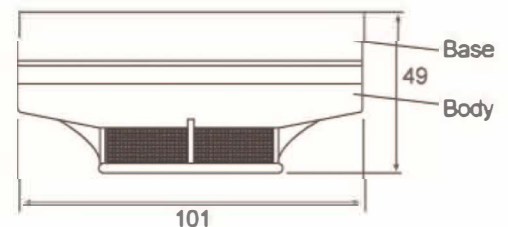

■ SPECIFICATION

MODEL NO.	CM-WT32L	SENSITIVITY SETTING	Comply to CNS
TYPE	2-wire	AMBIENT TEMP.	-10°C ~ +55°C
VOLTAGE RANGE	12V~30V DC	AMBIENT HUMIDITY	0 ~ 95%
ALARM CURRENT	24V DC 30mA	MATERIAL	Burning-Proof plastics
POLARIZATION	Non-Polarized	DIMENSIONS	101 (Dia.) x 49 (H)mm
STANDBY CURRENT	24V DC / 25 µA Below	WEIGHT	138g
		COLOR	White

■ EFFECTIVE ALERT AREA

HEIGHT/CONSTRUCTION	UNDER 4M	4M~8M
AREA COVER	150M ²	75M ²

บริษัท ที.เอส.อาร์. - เทเลคอม ซีสเท็มส์ จำกัด
โทร 02-528-0383 ถึง 7
Email : sales@tsr.co.th
Line ID : @tsrtelecom
Website : tsr.co.th

EM CHUNG MEI FIRE FIGHTING SUPPLIER CO.,LTD

CATALOG NO. CM-WT32L_J9F05